

FIGURE 1

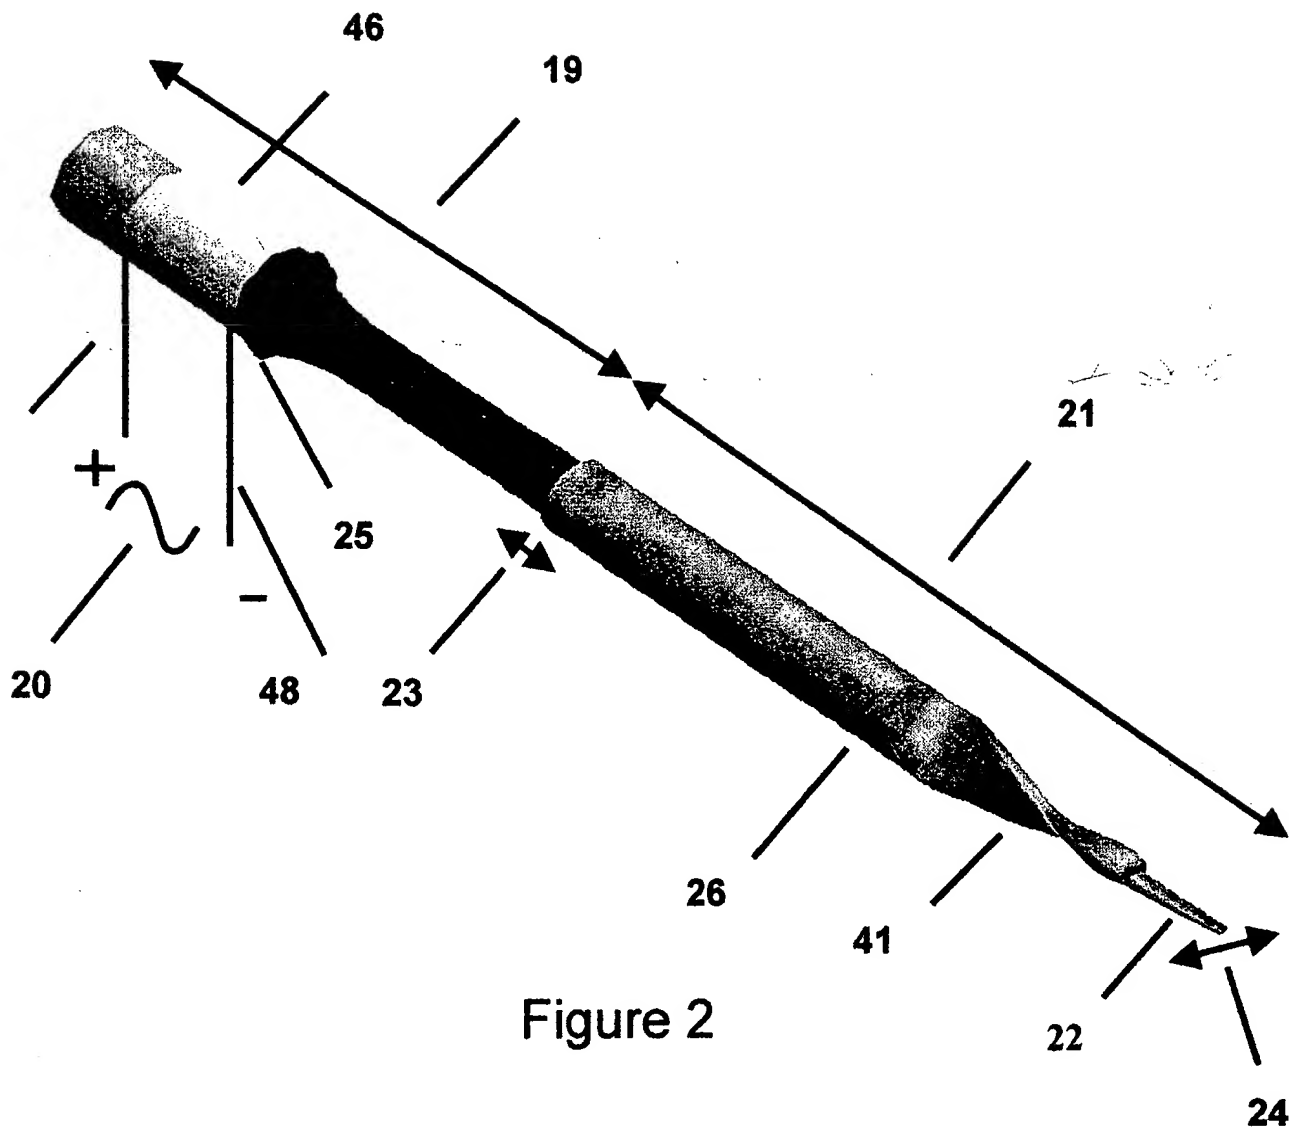


Figure 2

Figure 3 is a perspective view of the device 10 in a retracted position. The device 10 includes a handle 19, a spring 28, a plunger 29, a needle 22, and a guard 20. The handle 19 is connected to the plunger 29, which is connected to the needle 22. The guard 20 is positioned to cover the needle 22 when the device 10 is in the retracted position. The spring 28 is located between the handle 19 and the plunger 29. The device 10 is shown in a retracted position, with the needle 22 pointing away from the guard 20.

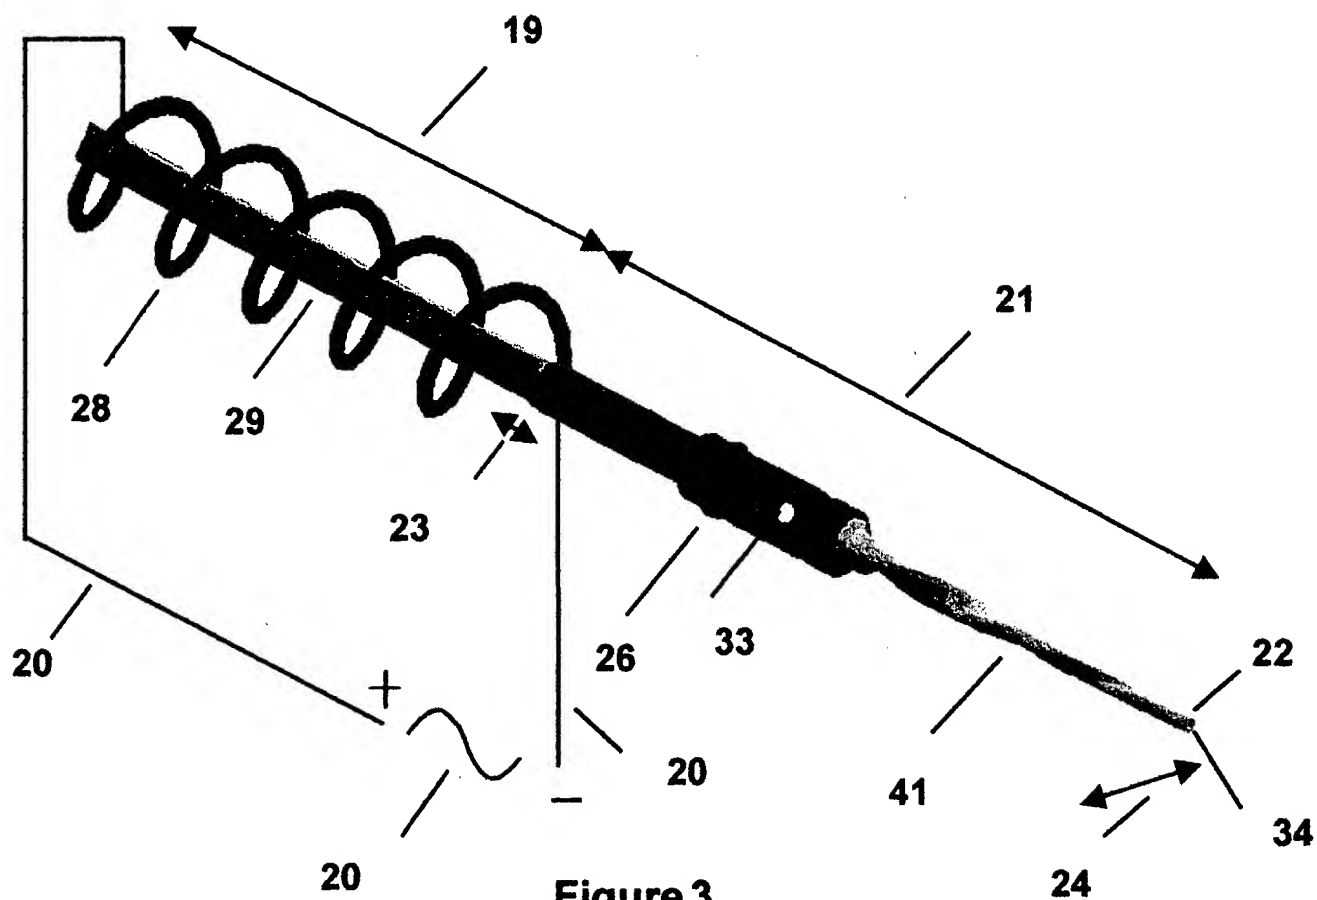


Figure 3

47

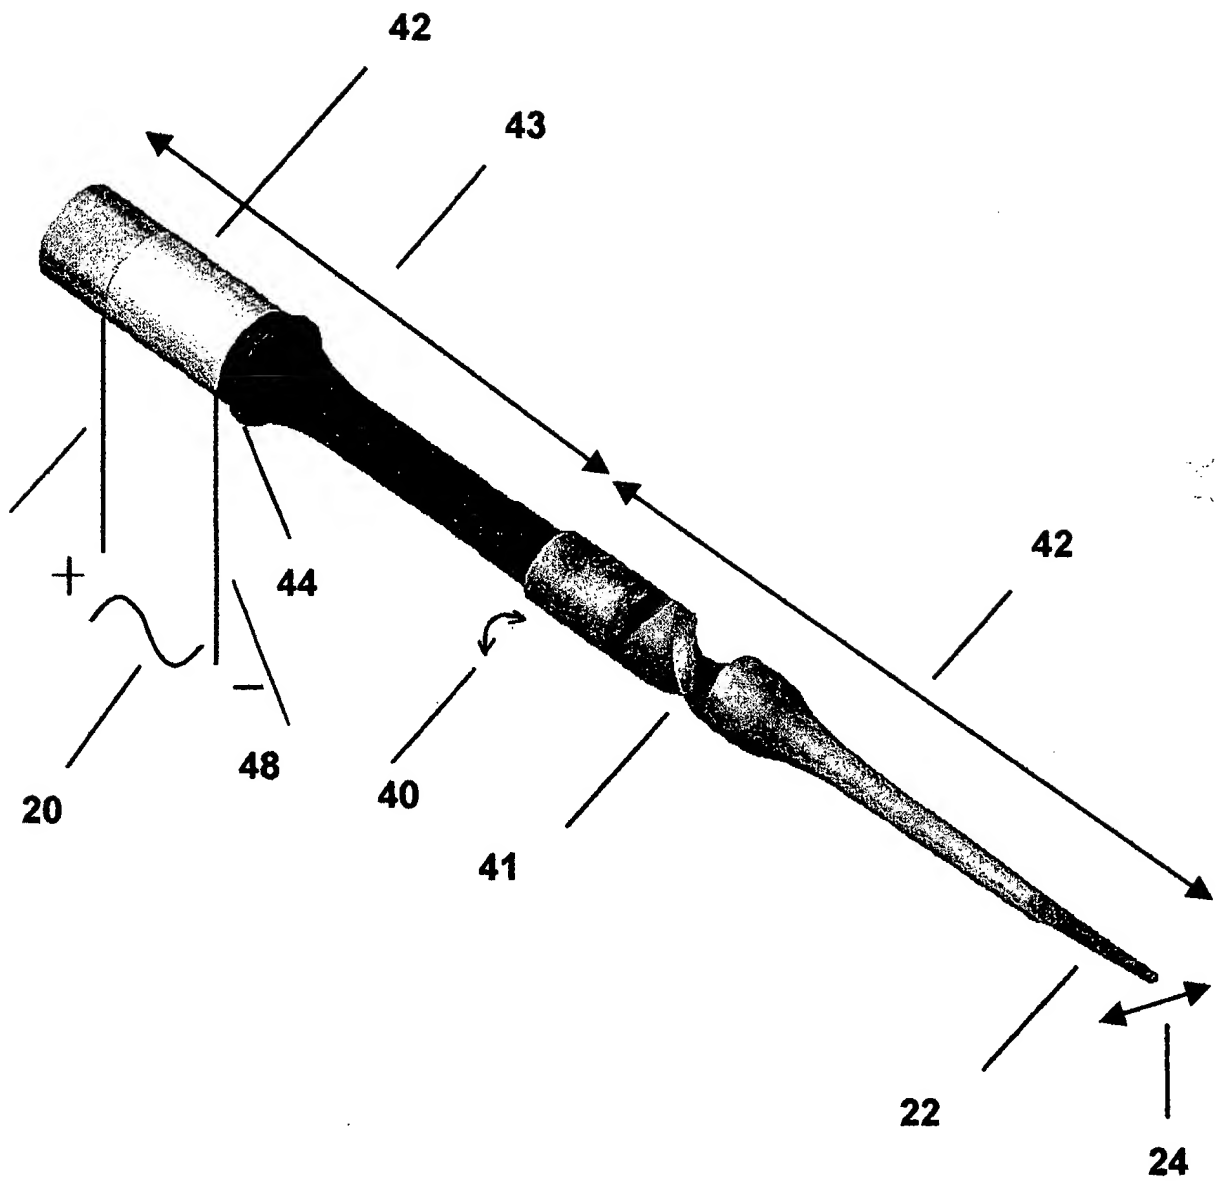


Figure 4